



SlowStop® IronFlex Rack End Guard—Type 1 (SS-T1Y-REP-xxx)

www.slowstop.com


Color: RAL 1023 Yellow Bollard on RAL 9005
Black Base

Diameter: 76,1 mm x 5 mm pipe

Height: 18.5 cm to Centerline (22,9 cm Overall)

Width:	800 mm	SS-T1Y-REP-80
	900 mm	SS-T1Y-REP-90
	1100 mm	SS-T1Y-REP-100
	1700 mm	SS-T1Y-REP-170
	1900 mm	SS-T1Y-REP-190

Max Tilt: 75mm

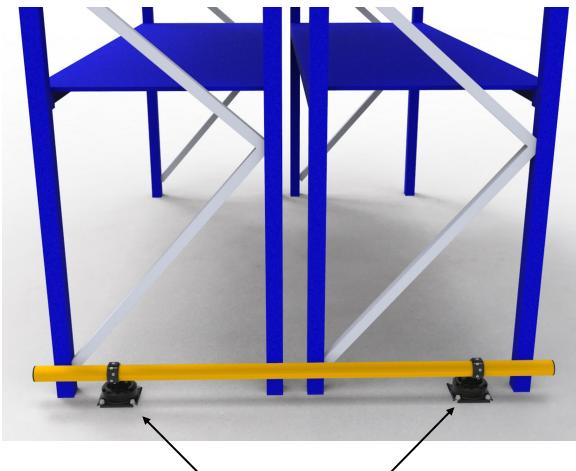

Installs with eight (8)
Concrete Anchor Screws

45 Degree Impacts										
MASS (KG)	1000	2000	3000	4000	5000	6000	7000	8000	9000	10000
SPEED (KPH)										
3.0										
3.5										
4.0										
4.5										
5.0										
5.5										
6.0										
6.5										
7.0										
7.5										
8.0										
8.5										
9.0										
10.0										

No Damage / Negligible Damage
Will Stop / Potential Damage to Guard
May Stop / Damage to Guard

SPECIFICATIONS

- Stopping Power Rating: 9.164 joules @ 45° Impact
- Temperature Rating: -40° to 70°C
- Pipe Coating: Galvanized + Polyester Powder Coat
- Base Coating: Environmentally Friendly Water-Based E-Coating + Polyester Powder Coat

RECOMMENDED USES



- Light Fork Lift Traffic
- Pallet and Storage Rack Ends
- Pallet Stops
- Electric Panel Protection
- Wall Guards
- Loading Dock Bays (wheel guides)

